
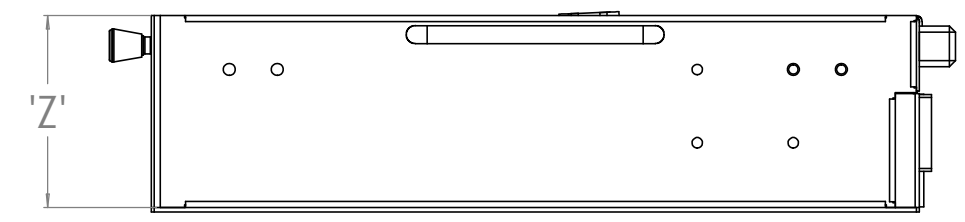
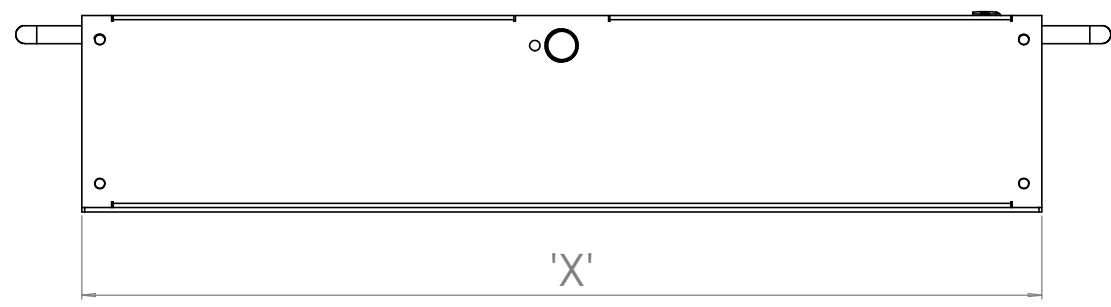
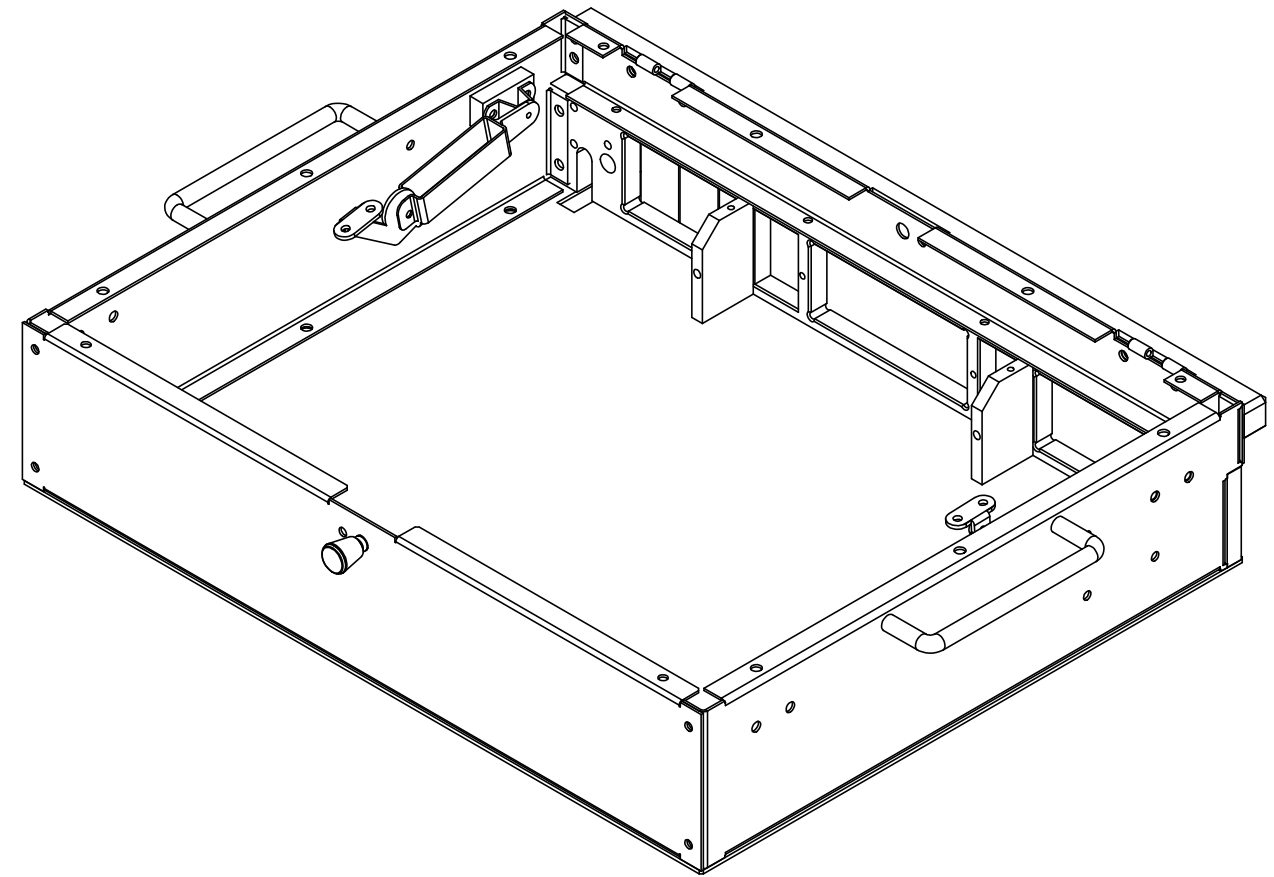


REV	DESCRIPTION	WHO	DATE
A	RELEASED PER ORIGINAL SPECIFICATION		

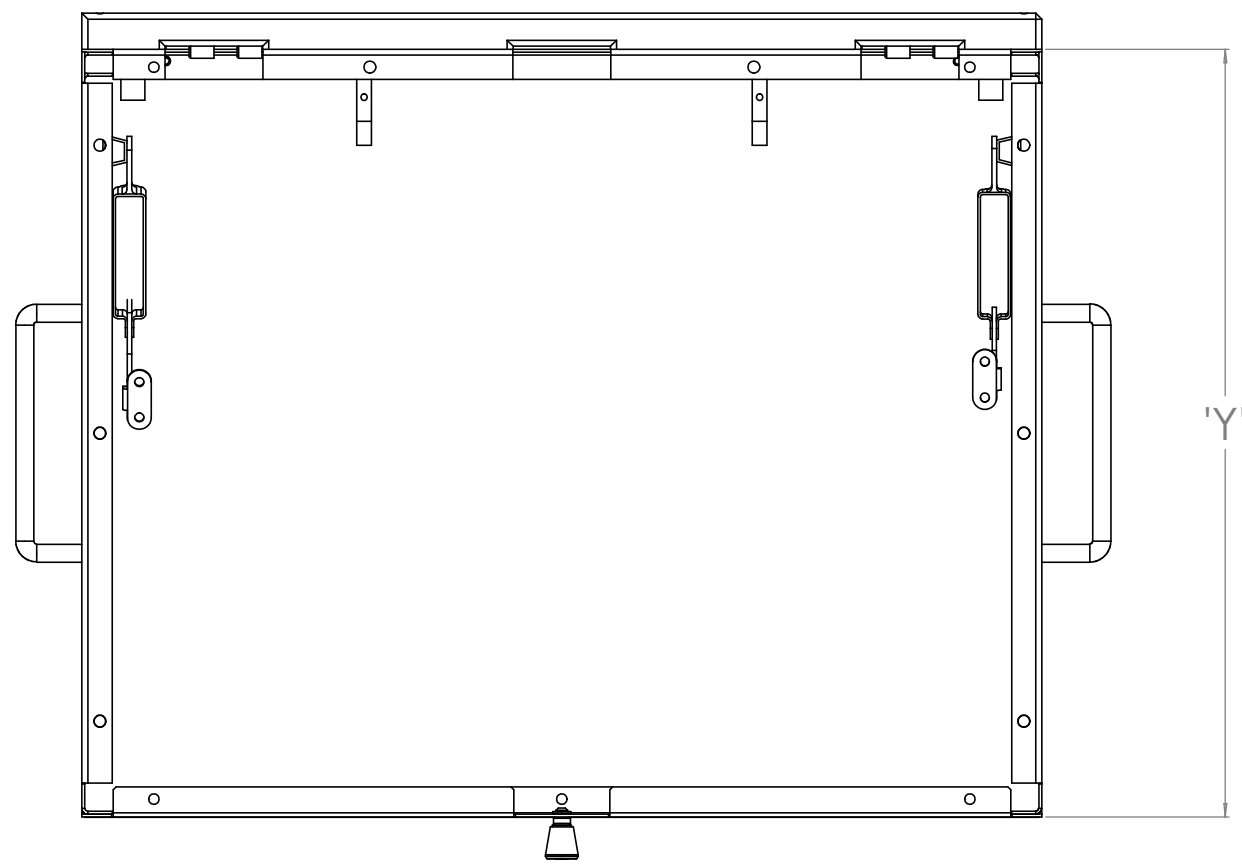

SERIES 3000 PAN DIMENSIONS			
ASM NUMBERS	X	Y	Z (in.)
ASM-3005	16.00" [406.4 mm]	20.00" [508 mm]	4.0, 6.0
ASM-3006	20.00" [508 mm]	16.00" [406.4 mm]	2.5, 4.0, 6.0, 8.0, SLP
ASM-3008	24.00" [609.6 mm]	20.00" [508 mm]	4.0, 6.0, 8.0, SLP
ASM-3010	30.00" [762 mm]	20.00" [508 mm]	4.0, 6.0, 8.0

MATERIAL:

TREATMENT/FINISH:

NEXT ASSEMBLY:

INTERPRET GEOMETRIC & ELECTRICAL SYMBOLS PER ANSI STANDARDS	DRAWN BY	14 HIGH STREET PLAINVILLE, MA 02762 (508) 384-8303
UNLESS OTHERWISE SPECIFIED USE THE FOLLOWING	DATE	
DEBURR & BREAK ALL SHARP EDGES APPROXIMATELY 0.01 ± 45°	CHECKED BY	
	DATE	

DATE: 7/15/2024

SEMCO
MACH. TO. EQUIPMENT

DESCRIPTION
SERIES 3000 PAN ASSEMBLY
DIMENSIONS

SIZE	PART/ASSEMBLY NUMBER	REV
D		

SCALE 1:5 SHEET 1 of 1

DRAWING VIEWS PROJECTED USING 3RD ANGLE

SEMCO PROPRIETARY
THIS DOCUMENT IS THE PROPERTY OF SEMCO MACHINE CORPORATION. IT IS TO BE RETURNED UPON REQUEST. REPRODUCTION BY ANY MEANS, DISCLOSURE, OR USE OF ITS CONTENTS FOR WHICH IT IS LOANED, WITHOUT WRITTEN CONSENT OF SEMCO MACHINE CORPORATION IS STRICTLY PROHIBITED.

TOLERANCE OR DIMENSIONS	125 / INCH	MAXIMUM MACHINE FINISH
2 PLACE	±.01	±.25mm
3 PLACE	±.005	±.127mm
4 PLACE	±.0005	±.0127mm
ANGLES	±30'	±30'

APPROVED BY: DATE: RELEASE DATE: